33500B and 33600A Series True*form* Waveform Generators 20, 30, 80, 120 MHz

- Built-in modulation and 17 popular waveforms
- Full bandwidth sine and square waves
- Lowest total harmonic distortion (THD) in its class
- One or two independent channels that can be coupled
- Trueform arbitrary waveform generation up to 1 GSa/s and 64 MSa





33500B and 33600A Series Trueform Function / Arbitrary Waveform Generators

- Easily generate the full range of signals you need for the most demanding measurements
- Test your devices with confidence that the waveform generator is outputting the signals you expect
- Select just the capabilities you need now, then upgrade easily when your needs change



Features

The 33500B and 33600A Series Trueform Function / Arbitrary waveform generators offer a variety of capabilities you can't find anywhere else—capabilities designed to help you accelerate your testing and get your project completed faster.

EASE OF USE	Large, color, graphical display offers simultaneous parameter setup, signal viewing, and editing along with a help system. Most standard waveforms and modulation are built-in including signal summing.
SIGNAL INTEGRITY	Trueform offers precise, low noise signals with the lowest jitter and harmonic distortion in its class. Create full bandwidth sine and square waves with Trueform generators.
Trueform Arbs	Trueform arbs ensure every waveform point is accurately represented, with up to 64 MSamples per channel. Segment waveforms to simplify waveform creation and save memory, connect up to 512 segments.
PULSE GENERATOR	Create a single pulse, a burst of pulses, or a steady pulse train with high bandwidth, up to 100 MHz. Set leading and trailing edge times independently down to 2.9 ns.
2-Channel Coupling	Quickly synchronize the independent outputs to share the same frequency, amplitude or both. The phase between the channels is also adjustable.
CONNECTIVITY	Use LAN, GPIB, USB, and USB thumb drive to automate testing or download waveforms. BenchVue Function Generator Control and Automation app simplifies the creation of waveforms and control of multiple instruments.
UPGRADEABILITY	Protect your investment. Configure your instrument, for now, and easily upgrade later.

Ease of Use: All the Features You Expect


The 33500B and 33600A Series function/arbitrary waveform generators offer the standard signals and features you expect, such as modulation, sweep, and burst. However, it also provides features that give you the capabilities and flexibility you need to get your job done quickly, no matter how complex. An intuitive front-panel user interface, for example, can be quickly and easily relearned when your attention has been focused elsewhere. And that is just the beginning.



- Large, color, graphical display offers simultaneous parameter setup, signal viewing and editing for easy operation
- Two independent channels which can be coupled in amplitude and frequency
- Front-panel USB thumb drive port for file management
- Built-in help system
- LAN (LXI Core), USB and optional GPIB connectivity for quick and easy connectivity to a PC or network
- External triggering

Modulation and built-in waveforms


17 arbitrary waveforms built-in, including standard waveforms such as sine, square, ramp, PRBS and Gaussian Noise. As well as specialty waveforms: Cardiac, Haversine, and Lorentz. Built-in modulations include AM, FM, PM FSK and PWM.

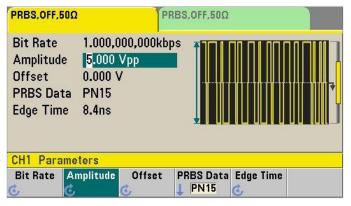


Test your digital serial buses by streaming standard PRBS patterns—PN3 through PN32.

Waveform summing and combining capability

Add noise to your signal for margin and distortion testing using only a single channel. You can create dual-tone multi-frequency signals without a dual-channel generator, which means you can preserve your budget for other test needs. On a two-channel model, you can sum and combine up to four signals.

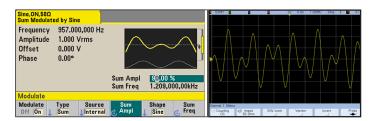

Dual-tone signal created by summing waveforms using the modulation type "Sum".

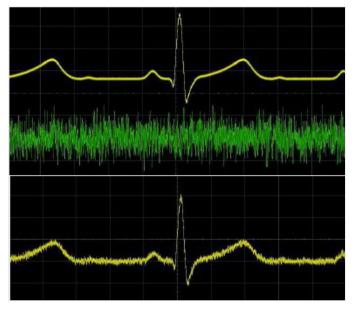

Add variable BW noise to any signal.

Smartphone and tablet access to full documentation


Need a quick answer? Get instant access to instrument documentation in seven different languages in smartphone-friendly WebHelp format. You can access all user documentation in the palm of your hand—no PC or hardcopy manuals required. Another feature you will not find in comparable function/arb generators.

Signal Integrity: Outputting the Signals You Expect

If your generator is introducing spurious signals or harmonics, you'll have a hard time producing reliable designs. To be successful, you need to test with clean, precise, low-noise signals. Keysight Trueform function / arbitrary waveform generators offer the highest signal fidelity so you can generate the exact waveforms you need for your most challenging measurements. You can be confident you are seeing your design's characteristics, and not that of your waveform generator, in your measurements.

Lowest jitter


With jitter as low as 1 ps, Trueform function / arbitrary waveform generators offer exceptional edge stability. You can even use them as a system clock for timing and triggering your other instruments. With better jitter performance, you can place edges more accurately, helping you reduce timing errors in your circuit design.

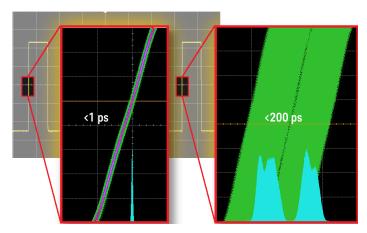


 $\label{thm:compared} True form technology shown on the left significantly improves jitter performance compared to a traditional function generator shown on the right.$

Lowest harmonic distortion

With total harmonic distortion of just 0.03%, Trueform waveform generators offer up to 5x better fidelity than other generators. Clean, spurious-free signals don't introduce noise or artifacts. See your design's characteristics, not the waveform generator's, in your measurements.

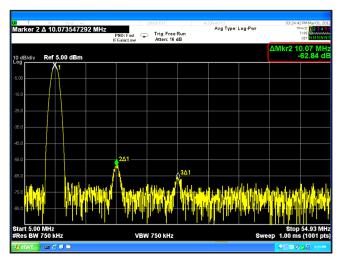

Trueform function / arbitrary waveform generators offer the lowest total harmonic distortion (THD) in its class.

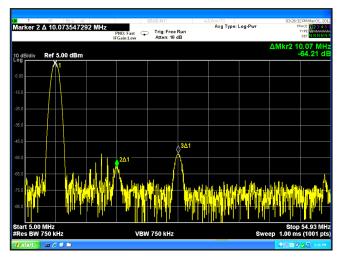

Typical direct digital synthesizer (DDS) generator has a higher noise floor and greater harmonics.

Reproduce lower-voltage output signals

Today's ultra-low-power products such as pacemakers, hearing aids and remote sensors use very low voltages. With Trueform function / arbitrary waveform generators, you can create signals as low as 1 mVpp. That is a 10x lower voltage range than typical waveform generators.

Use the optional high-stability time base for even better accuracy

Get improved time-based stability and frequency accuracy using the optional high-stability time base. The optional timebase offers 0.1 ppm stability, which is 20x more stable than the standard time base over one year.

Trueform Arbs: Generating a Full Range of Signals for the Most Demanding Requirements


Trueform function / arbitrary waveform generators use a technology that plays every point in your signal exactly as you designed it. That means to test the robustness of your design, you can create a specific signal with noise, overshoots, spikes and dropouts just where you need them.

Non aliasing


Define any waveform shape and any waveform length using the Trueform arbitrary waveform capability. Play your signals as defined, at your exact sample rate, without the chance of missing short-duration anomalies that are critical for testing device reliability.


Waveform sequencing


Waveform sequencing lets you create multiple configured waveforms with several common segments and lets you build long, complex waveforms using minimal instrument memory.

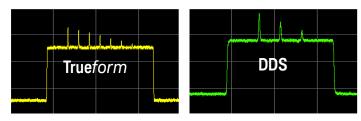


While DDS technology may skip points at higher frequencies, Trueform never skips points and is always anti-aliased.










Sequence of desired signals.

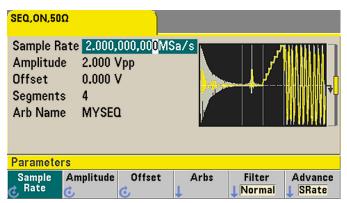

Waveform generator display of the desired sequence.

Standard deep memory

If you want to test your design with long, complex waveforms with a variety of anomalies, you need to make sure your waveform generator has sufficient memory. The 33500B and 33600A Series come standard with 1 M Samples and 4 M Samples deep memory respectively. Typical DDS generators offer only a fraction of that capacity. In addition to this, higher memory options up to 64 MSamples are available to handle your most complex waveforms.

How does Keysight get such revolutionary advances over previous generation DDS signal generation?

As with any technology, DDS has its limitations. Engineers with exacting requirements have had to either work around the compromised performance or spend up to 5 times more for a high-end, point-per-clock waveform generator.

Keysight's Trueform technology offers an alternative that blends the best of DDS and point-per-clock architectures, giving you the benefits of both without the limitations of either. Trueform technology uses an exclusive digital sampling technique that delivers unmatched performance at the same low price you are accustomed to with DDS.

You can find a detailed comparison of DDS and Trueform technology in the Technical Overview- Trueform Waveform Generation Technology

	Signal in	tegrity improvements of	True <i>form</i> technology ove	er DDS	
	DDS: Traditional 25 MHz waveform generator	Trueform: Keysight 20 MHz and 30 MHz waveform generators	DDS: Traditional 100 MHz waveform generator	Trueform: Keysight 80 MHz and 120 MHz waveform generators	Improvements
Edge jitter	< 500 ps	< 40 ps	< 200 ps	< 1 ps	12x to 200x better
Custom waveform replication	Skips waveform points	100% point coverage	Skips waveform points	100% point coverage	Exact waveform replication
Total harmonic distortion	0.2%	0.04%	0.2%	0.03%	Up to 5x better
Anti-alias filtering	Must provide externally	Always anti-aliased	Must provide externally	Always anti-aliased	No anti-aliasing artifacts
Sequenced arb	Not possible	Standard	Not possible	Standard	Easy creation of complex waveform sequences


Pulse Generator with Fast Edge Times

Create pulses up to 100 MHz with the Trueform function / arbitrary waveform generators. Most DDS-based generators offer reduced bandwidth when generating pulses. Trueform waveform generators produce higher harmonic content, allowing for rapid transitions. Like a dedicated pulse generator, edge times can be set independently down to 2.9 ns, which is twice as fast as a typical function generator.

Channel Coupling with Baseband Generation Capability

Channel coupling simplifies the operation of a two-channel function generator. Both channels can be controlled with a single parameter for phase, amplitude, or frequency, making it simple to create differential or tracking signals. In addition, IQ signal generation has now been made easier with the IQ Baseband Signal Player for Trueform function / arbitrary waveform generators. The IQ Baseband Signal Player configures and controls both channels as if they were a single channel. It also keeps the phase of each channel in nominal IQ range. Quickly, go from simulation to signal generation to test your RF component or system design.

Connectivity: Flexibility in Creating and Playing Waveforms

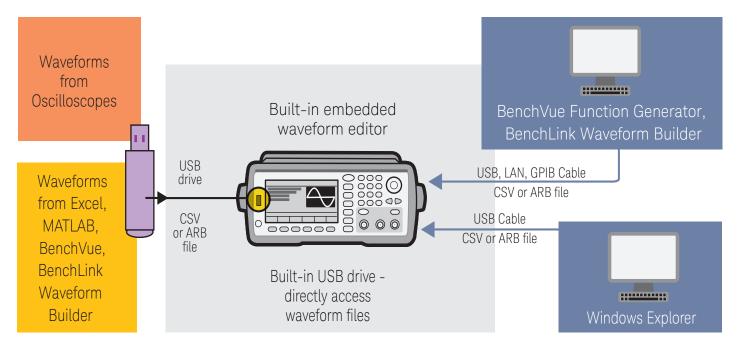

Multiple interfaces provide flexibility for creating and downloading waveforms.

Keysight BenchVue Software (Now Included)

Keysight BenchVue software for the PC makes it simple to connect, control instruments, and automate test sequences so you can quickly move past the test development phase and access results faster with just a few clicks.

The Function Generator Control and Automation App within BenchVue is now included with your instrument purchase

- Point and click to control your function generators
- Advanced waveform creation and editing capability with embedded Keysight BenchLink Waveform Builder Pro
- Load custom arbitrary waveforms from files
- Drag-and-drop measured traces easily from the BenchVue Oscilloscope App
- Rapidly build custom test sequences with Test Flow
- Remotely monitor and control your function generators from anywhere via the BenchVue Mobile app
- Access deeper instrument controls with Command Expert integration
- Intuitively control, automate and simplify testing with your function generators, and hundreds of other Keysight instruments

Keysight BenchLink Waveform Builder Pro Software

Easily create custom waveforms with advanced waveform creation and editing software. The application is now included within the Function Generator App.

- Library of signals
- Freeform draw and edit
- Equation editor, waveform math
- Apply filters and windowing functions
- Create waveform sequences

Download BenchVue software at no cost today visit www.keysight.com/find/benchvue

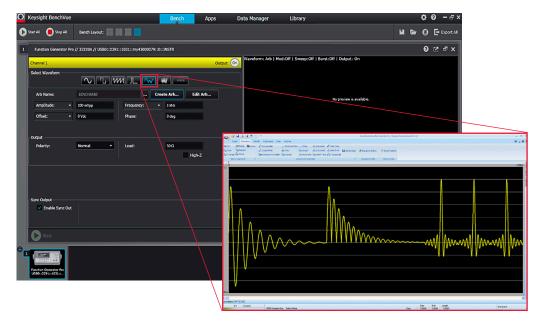


Figure 1. Design and build arbitrary waveform with Benchlink Waveform Builder Pro within BenchVue Function Generator App.

Select the Capabilities You Need Now, Then Upgrade Easily When Your Needs Change

With most waveform generators, you get what you pay for when you buy your instrument. However, with the 33500B and 33600A Series function / arbitrary waveform generators, there are four different models to choose from so you can purchase the capability you need now and simply upgrade later when your project needs change. Your investment in test equipment is protected. If you need deeper memory for generating more complex signals, you can easily add the capability later with software upgrades. And there's no price penalty for adding the capability later.

Configuration Guide

Step 1. Choose your bandwidth and channel count

Bandwidth	20 MHz	20 MHz	30 MHz	30 MHz	80 MHz	80MHz	120 MHz	120 MHz
Number of channels	1	2	1	2	1	2	1	2
Waveform generator	33509B	33510B	33519B	33520B	-	-	-	-
Waveform generator with arbitrary capability	33511B	33512B	33521B	33522B	33611A	33612A	33621A	33622A

Step 2. Tailor your waveform generator for more demanding applications

Application	Order option
Additional memory for long waveforms	MEM (only available on models with arbitrary)
Security features with NISPOM	SEC
OCXO-high stability timebase	OCX

Step 3. Upgrade your waveform generator in the future

Upgrade desired	Order upgrade option (for 33500B series)	Order upgrade option (for 33600A series)
Increase bandwidth	335BW1U on 1-channel models (up to 30 MHz)	336BW1U on 1-channel models (up to 120 MHz)
	335BW2U on 2-channel models (up to 30 MHz)	336BW2U on 2-channel models (up to 120 MHz)
Add arbitrary waveform capability	335ARB1U on 1-channel models	
	335ARB2U on 2-channel models	
Increase arbitrary memory	335MEM1U on 1-channel arb models (inc to 16M)	336MEM1U on 1-channel models (inc to 64M)
	335MEM2U on 2-channel arb models (inc to 16M)	336MEM2U on 2-channel models (inc to 64M)
Add NISPOM and file security	335SECU	336SECU
Add high stability timebase	33500U-OCX (must return to Keysight) ³	33600U-OCX (must return to Keysight) ³
Add GPIB	-	3446GPBU (customer installable)

- A 1-channel generator cannot be "upgraded" to a 2-channel generator.
 GPIB option is included as standard for 33500B Series.
- 3. This option upgrade must be returned to Keysight for installation and calibration.

Step 4. Add on optional accessories

Optional accessories	Description
34162A	Accessory pouch
1CM124A	Rackmount kit with filler panel
1CM107A	2U dual flange kit (mounting two instruments side-by-side)
34194A	Dual Lock link kit (to connect the two units together)

Specifications

Unless otherwise stated, all specifications apply with a $50-\Omega$ resistive load and automatic amplitude range selection enabled.

Instrument characteristics

Models and options											
Model number	33509B	33510B	33519B	33520B	33611A	33612A	33621A	33622A			
	33511B	33512B	33521B	33522B							
Maximum frequency	20 MHz	20 MHz	30 MHz	30 MHz	80 MHz	80 MHz	120 MHz	120 MHz			
Number of channels	1	2	1	2	1	2	1	2			
Option MEM	Increase arb	Increase arb waveform memory to 16 MSa/Channel ¹⁵ Increase arb waveform memory from 4 MSa/Channel to 64 MSa/Channel									
Option SEC	Enables NISPOM and file security										
Option OCX	Oven-controlled frequency reference for improved stability, jitter, and phase noise										
Waveforms											
Standard		Sine, Square, Rar	mp, Pulse, Triang	le, Gaussian Noi	se, PRBS (Pse	udorandom Bir	nary Sequence),	DC			
Built-in arbitrary ¹⁵	Cardia	c, Exponential Fal	l, Exponential Ris	e, Gaussian Pul	se, Haversine,	Lorentz, D-Lor	entz, Negative F	Ramp, Sinc			
User-defined arbitrary 15	Up to 1 MSa	(16 MSa with Opt	ion MEM) with m	ulti segment	Up to 4 MS	Sa (64 MSa wit	h Option MEM) v	vith multi			
	sequencing				segment s	equencing					
Operating modes and mod	dulation types										
Operating modes		Cor	ntinuous, Modula	te, Frequency S	weep, Counted	d Burst, Gated	Burst				
Modulation types			AM, FM, PM, F	SK, BPSK, PWN	1, Sum (carrier	+ modulation)					

Footnotes referenced on page 18.

Page 9 Find us at www.keysight.com

Waveform characteristics

Footnotes referenced on page 18.

Sine Trueform Series	33500B models	336004	models		
Frequency range	V_{ουτ} ≤ 10 V_{pp}: 1 μHz to 20 MHz or 30 MHz, 1-μHz resolution	V <10 V · 1 uHz to 6	60 MHz, 1-μHz resolution 0 MHz, 1-μHz resolution 0 MHz, 1-μHz resolution ¹		
Amplitude flatness (spec) 2, 3, 17	V _{OUT} ≤ 10 V _{pp}	V _{OUT} =	= 1 V _{pp}		
(relative to 1 kHz)	f_{OUT} < 100 kHz: \pm 0.10 dB f_{OUT} 100 kHz to 5 MHz: \pm 0.15 dB f_{OUT} 5 MHz to 20 MHz: \pm 0.30 dB f_{OUT} 20 MHz to 30 MHz ¹⁶ : \pm 0.40 dB	f _{our} 10 MHz to 6	Hz: ± 0.10 dB 0 MHz: ± 0.20 dB 0 MHz: ± 0.30 dB 0 MHz ¹ : ± 0.40 dB		
		V _{out} :	1 V _{pp}		
		f _{our} 60 MHz to 8	Hz: ± 0.10 dB 0 MHz: ± 0.25 dB 0 MHz: ± 0.40 dB 0 MHz ¹ : ± 0.50 dB		
Harmonic distortion (typ) ^{2, 17}	$V_{OUT} \le 10 V_{pp}$	V _{out} =	= 1 V _{pp}		
	f _{оит} < 20 kHz: < -70 dBc f _{оит} 20 kHz to 100 kHz: < -65 dBc f _{оит} 100 kHz to 1 MHz: < -50 dBc	$f_{OUT} = 1 \text{ MHz to}$	Hz: -70 dBc 10 MHz: -61 dBc Hz: -43 dBc		
	f _{OUT} 1 MHz to 20 MHz: < -40 dBc f _{OUT} 20 MHz to 30 MHz ¹⁶ : < -35 dBc	V _{OUT} =	= 4 V _{pp}		
	1 ₀₀₁ 20 mm2 to 00 mm2 1 1 00 db0	$f_{OUT} < 1 \text{ MHz: -69 dBc}$ $f_{OUT} = 1 \text{ MHz to 10 MHz: -58 dBc}$ $f_{OUT} > 10 \text{ MHz: -36 dBc}$			
		$V_{OUT} = 8 V_{pp}$			
		f_{OUT} < 1 MHz: -68 dBc f_{OUT} = 1 MHz to 10 MHz: -54 dBc f_{OUT} > 10 MHz: -40 dBc			
		$V_{OUT} = 10 V_{pp}$			
		f_{OUT} < 1 MHz: -67 dBc f_{OUT} = 1 MHz to 10 MHz: -51 dBc f_{OUT} > 10 MHz: -39 dBc			
THD (typ) ²	V _{OUT} ≤ 10 V _{pp}	V _{OUT} :	= 1 V _{pp}		
	f _{OUT} = 20 Hz to 20 kHz: <0.04%	$f_{OUT} = 20 \text{ Hz to}$	20 kHz: 0.03%		
		V _{OUT} > 1 V _{pp}			
		f _{out} = 20 Hz to	20 kHz: 0.04%		
Non-harmonic suprious (typ) ^{2, 4, 17}	Standard < -75 dBc, increasing 20 dB/decade above 2 MHz	$f_{OUT} < 10 \text{ MHz: } -80 \text{ dBc}$ $f_{OUT} = 10 \text{ MHz to } 60 \text{ MHz: } -75 \text{ dBc}$ $f_{OUT} > 60 \text{ MHz: } -70 \text{ dBc}$			
	Option OCX: < -75 dBc increasing 20 dB/decade above 10 MHz	T _{OUT} > 60 M	HZ: -/U QBC		
Db (OOD) (+,) 5	(or < -100 dBm, whichever is greater, below 500 MHz)	04	0t\100 MUI-\1		
Phase noise (SSB) (typ) ⁵	Standard	Standard (80 MHz) 100-Hz offset: -105 dBc/Hz	Standard (120 MHz) ¹ 100-Hz offset: -101 dBc/Hz		
	1-kHz offset: -105 dBc/Hz 10-kHz offset: -115 dBc/Hz 100-kHz offset: -125 dBc/Hz	1-kHz offset: -116 dBc/Hz 10-kHz offset: -122 dBc/Hz 100-kHz offset: -129 dBc/Hz	1-kHz offset: -112 dBc/Hz 10-kHz offset: -118 dBc/Hz 100-kHz offset: -125 dBc/Hz		
	Opt OCX	Opt OCX (80 MHz)	Opt OCX (120 MHz) 1		
	1-kHz offset: -110 dBc/Hz 10-kHz offset: -125 dBc/Hz 100-kHz offset: -135 dBc/Hz	100-Hz offset: -114 dBc/Hz 1-kHz offset: -122 dBc/Hz 10-kHz offset: -125 dBc/Hz 100-kHz offset: -131 dBc/Hz	100-Hz offset: -110 dBc/Hz 1-kHz offset: -118 dBc/Hz 10-kHz offset: -121 dBc/Hz 100-kHz offset: -127 dBc/Hz		

Waveform characteristics (Continued)

Footnotes referenced on page 18.

Trueform Series	33500B models	33600A models			
Frequency ranges	V _{OUT} ≤ 10 V _{pp}	V _{OUT} ≤ 10 V _{pp}			
	1 μHz to 20 MHz or 30 MHz, 1-μHz resolution	1 μHz to 50 MHz, 1-μHz resolution V _{ouτ} ≤ 4 V _{pp}			
		1 μHz to 100 MHz, 1-μHz resolution ¹			
Rise and fall times (nom)	$V_{OUT} \le 10 V_{pp}$	$V_{OUT} \le 4 V_{pp}$			
		Square: 2.9 ns			
	Square: 8.4 ns, fixed	Pulse: 2.9 ns to 10 μs, independently variable, 100-ps resolution			
	Pulse: 8.4 ns to 1 μ s, independently variable,	$V_{OUT} > 4 V_{pp}$			
	100-ps resolution	Square: 4.0 ns			
		Pulse: 3.3 ns to 10 μs, independently variable, 100-ps resolution			
Overshoot (typ)	$V_{OUT} \le 10 V_{pp}$	V _{OUT} ≤ 4 V _{pp}			
		Square: < 4%			
		Pulse, min edge: < 4%			
		Pulse, 4-ns edge: < 2%			
		Pulse, ≥ 6-ns edge: < 2%			
	< 2%	$V_{OUT} > 4 V_{pp}$			
		Square: < 4%			
		Pulse, min edge: < 7%			
		Pulse, 4-ns edge: < 4%			
Dutu quala fi	0.010/ +a	Pulse, ≥ 6-ns edge: < 2%			
Outy cycle ⁶ Pulse width	V _{OUT} ≤ 10 V _{pp}	99.99%, 0.01% resolution			
	VOUT = 10 Vpp	$V_{OUT} \leq 4 V_{pp}$			
		5 ns minimum (high or low), 1-ps resolution			
	16 ns minimum, 100-ps resolution	$V_{OUT} > 4 V_{pp}$			
1:440 x (xm x)/m x x x x 7	1 11= to 20 MH= or 20 MH= bond	8 ns minimum (high or low), 1-ps resolution			
Jitter (rms)(meas) ⁷	1 Hz to 20 MHz or 30 MHz band	10 Hz to 40 MHz band Standard: < 1 ps			
	Standard: < 40 ps	Opt OCX: < 0.5 ps			
Ramp and Triangle		орт обл. ч б.б рб			
Trueform Series	33500B models	33600A models			
requency range	1 μHz to 200 kHz, 1-μHz resolution	1 μHz to 800 kHz, 1-μHz resolution			
Ramp symmetry	0% to 100%, 0.1% resolution, (0% is	negative ramp, 100% is positive ramp, 50% is triangle)			
Non-linearity (typ)	< 0.05% from 5	% to 95% of the signal amplitude			
Gaussian Noise					
Trueform Series	33500B models	33600A models			
Variable bandwidth (typ)	$V_{OUT} \le 10 V_{pp}$	V _{out} ≤ 10 V _{pp}			
	_	1 mHz to 60 MHz			
		$V_{OUT} \le 8 V_{pp}$			
	1 mHz to 20 MHz or 30 MHz	1 mHz to 80 MHz			
		$V_{OUT} \le 4 V_{pp}$			
		1 mHz to 120 MHz ¹			
Crest factor (nom)	4.6	4.6			
Repetition period	> 50 years	> 100 years			

Waveform characteristics (Continued)

Pseudorandom Binary Sequ	uence (PRBS)								
Trueform Series	335	33500B models 33600A models							
Bit rate	V	_{DUT} ≤ 10 V _{pp}		1	/ _{OUT} ≤ 10 V _{pp}				
	1 mbps to 50 N	Лbps, 1-mbps resolu	tion	1 mbps to 100	Mbps, 1-mbps resolu	ution			
	·				V _{OUT} ≤ 4 V _{np}				
					Mbps, 1-mbps resolu	tion ¹			
Sequence length	2 ^m 1 m :	= 7, 9, 11, 15, 20, 23		'	- 1, m = 3 to 32				
Rise and fall times (nom)	· · · · · · · · · · · · · · · · · · ·	_ 7, 9, 11, 10, 20, 20 _{DUT} ≤ 10 V _{pp}			V _{OUT} ≤ 4 V _{np}				
Nise and fall times (nom)	V	OUT ~ 10 v pp			PF				
				2.9 ns to 1 ms, indeper		ps resolution			
	8.4 ns to 1 μs, variab	le, 100-ps or 3-digit	resolution		V _{OUT} > 4 V _{pp}				
				3.3 ns to 1 ms, indeper	ndently variable, 100-	ps resolution			
Arbitrary waveforms									
Waveform length	8 Sa to 1 MSa per channel				4 MSa per channel	(1.0			
Cample rate		(16 MSa with opt MEM), in increments of 1 Sa			MEM), in increments				
Sample rate	20 MHz models: 1 μSa/s to 160 MSa/s, 1-μSa/s resolution			80 MHz models: 1 μSa/s to 660 MSa/s, 1-μSa/s resolution ⁸ 120 MHz models: 1 μSa/s to 1 GSa/s, 1-μSa/s resolution ⁸					
	30 MHz models: 1 µSa/s to 250 MSa/s,			120 ΜΠ2 Πουσίδ. 1 μοσ	//3 to 1 ασά/3, 1-μσά/	75 1 650 (01)011			
		Sa/s resolution	, , ,						
Voltage resolution	1	16 bits		14 bits					
Waveform filters	"Normal" (highest	bandwidth, ~5% pre	shoot and oversl	hoot), "Step" (lower bandw	ridth, ~0% preshoot a	nd overshoot), or			
				to point occur as quickly a					
Frequency and time characteristics	Filter="Normal"	Filter="Step"	Filter="Off"	Filter="Normal"	Filter="Step"	Filter="Off"			
Bandwidth (-3 dB)(nom)	0.27 x (Sa rate)	0.13 x (Sa rate)	40 MHz	0.27 x (Sa rate)	0.13 x (Sa rate)	100 MHz			
Rise and fall time (nom)	0.35/bandwidth	0.35/bandwidth	10 ns	0.35/bandwidth	0.35/bandwidth	3.5 ns			
/	(10 ns min)	(10 ns min)		(3.5 ns min)	(3.5 ns min)				
Jitter(rms)(meas) ⁸	< 5 ps	< 5 ps	< 40 ps	< 2 ps	< 1 ps	< 10 ps			
Arb waveform sequencing Operation		ary way of arma lagam	antal can be car	mbined into year defined li	ata (aaguanaaa) ta far	m langar mara			
Operation		Individual arbitrary waveforms (segments) can be combined into user defined lists (sequences) to form longer, more complex waveforms. Each sequence step specifies whether to repeat the associated segment a certain number of times, to							
	repeat indefinitely, to repeat until a Trigger event occurs, or to stop and wait for a Trigger event. Additionally, the behavior								
	of the Sync output	(Marker) can be spe		ep. To improve throughput,	multiple sequences a	and segments can			
Segment length	8 Saito 1 MSainer	channel (16 MSa wit		ded into volatile memory. 1), in 32 Sa to 4 MSa per channel (64 MSa with Option MEM), in					
oogmont tongth	o oa to i moa per	increments of 1 Sa	in option milimi, i	·	increments of 1 Sa	ii Option Willim/, III			
Sequence length			1 1	to 512 steps					
	1 to 1×10^{10} , or infinite 1 to 1×10^{6} , or infinite								

Footnotes referenced on page 18.

Waveform output characteristics (Continued)

General	
Connector	Front-panel BNC, shell and pin isolated from chassis (± 42 V maximum)
Function	On, Off, or Inverted
Output impedance (nom)	50 Ω
Isolation	Connector shells for channel output(s), Sync, and Mod In are connected together but isolated from the instrument's chassis. Maximum allowable voltage on isolated connector shell or pin is \pm 42 V relative to chassis.
Overload protection	Output turns off automatically when an overload is applied. Instrument will tolerate a short circuit to ground indefinitely.
Amplitude	
Range ⁹	1 mVpp to 10 Vpp into 50 Ω, 4-digit resolution
	2 mVpp to 20 Vpp into open circuit, 4-digit resolution
Units	Vpp, Vrms, or dBm
Accuracy (at 1 kHz) (spec) 3, 17	± (1% of setting in Vpp) ± (1 mVpp)
Voltage limit function	User-definable maximum and minimum voltage limits
DC offset	
Range ¹⁸	\pm (5 VDC - Peak AC) into 50 Ω , 4-digit resolution
	± (10 VDC - peak AC) into open circuit, 4-digit resolution
Units	VDC
Accuracy (spec) 3, 17	± (1% of Offset setting) ± (0.25% of amplitude in Vpp) ± (2 mV)
Frequency accuracy (spec)	
Standard frequency reference	± (1 ppm of setting + 15 pHz), 1 year, 23 °C ± 5 °C
	± (2 ppm of setting + 15 pHz), 1 year, 0 °C to 55 °C
High stability frequency reference (Option OCX)	± (0.1 ppm of setting + 15 pHz), 1 year, 0 °C to 55 °C

Modulation, burst, and sweep capability

Carrier	AM	FM	PM	FSK	BPSK	PWM	Sum	Burst	Sweep
Sine and square								•	
Pulse	•						•		
Ramp and triangle									
Gaussian noise								1 0	
PRBS	•		•				•		
Single arbitrary ²⁰	•		•				•		
Sequenced arbitrary ²⁰	•						•		

Modulating signals

Carrier	Sine	Square	Ramp	Triangle	Noise	PRBS	Arbitrary ²⁰	External
Sine	-						-	
Square and pulse	•		•	•	•	•	•	•
Ramp and triangle	•				•	•	•	•
Gaussian noise	•						•	•
PRBS							•	•
Arbitrary ²⁰	•		•	•	•			

Footnotes referenced on page 18.

Legend	
	All models
	Only 33600A Series models

Modulation, burst, and sweep characteristics

Amplitude modulation	(AM)
Source	Internal or external (all models), or other channel (all 2-channel models)
Туре	Full-Carrier or Double-Sideband Suppressed-Carrier (DSSC)
Depth ^{3, 11}	0% to 120%, 0.01% resolution
Frequency modulation	(FM) ¹²
Source	Internal or external (all models), or other channel (all 2-channel models)
Deviation	1 μHz to 15 MHz, 1-μHz resolution (all 33500 Series models)
	1 μHz to 40 MHz, 1-μHz resolution (33611A/33612A)
	1 µHz to 60 MHz, 1-µHz resolution (33621A/33622A)
Phase modulation (PM)	
Source	Internal or external (all models), or other channel (all 2-channel models)
Deviation	0° to 360°, 0.1° resolution
Frequency-shift key m	odulation (FSK) ¹²
Source	Internal timer or rear-panel connector
Mark and space	Any frequency within the carrier signal's range
Rate	≤1 MHz
Binary phase-shift key	modulation (BPSK)
Source	Internal timer or rear-panel connector
Phase shift	0° to 360°, 0.1° resolution
Rate	≤1 MHz
Pulse width modulatio	n (PWM)
Source	Internal or external (all models), or other channel (all 2-channel models)
Deviation ⁶	0% to 100% of pulse width, 0.01% resolution
Additive modulation (S	um)
Source	Internal or external (all models), or other channel (all 2-channel models)
Ratio ¹¹	0% to 100% of carrier amplitude, 0.01% resolution
Burst characteristics 1	
Туре	Counted or gated
Counted burst	Each trigger event causes the instrument to produce from 1 to 108 or an "infinite" number of waveform cycles
operation	
Gated burst operation	Instrument produces waveforms while the trigger is in the "on" state. For Gaussian Noise, waveform generation stops
	immediately when the trigger is in the "off" state. All other waveforms stop at the completion of a cycle; more than one cycle
	might elapse before generation stops.
Start/stop phase ¹⁹	-360° to +360°, 0.1° resolution
Trigger source	Internal timer or rear-panel connector
Marker	Indicated by the trailing edge of the Sync pulse; adjustable to any cycle of the burst
Sweep characteristics	
Туре	Linear, Logarithmic, or List (up to 128 user-defined frequencies)
Operation	Linear and Logarithmic sweeps are characterized by a Sweep time (during which the frequency changes smoothly from Start
	to Stop), a Hold time (during which the frequency stays at the Stop frequency), and a Return time (during which the frequency
	changes smoothly from Stop to Start). Returns are always linear in the 33600A Series.
Direction	Up (start freq < stop freq) or Down (start freq > stop freq)

Footnotes referenced on page 18.

Modulation, burst, and sweep characteristics (Continued)

Sweep time	
Linear	1 millisecond to 3,600 seconds, 1-ms resolution
	3,601 seconds to 250,000 seconds, 1-second resolution
Logarithmic	1 millisecond to 500 seconds, 1-ms resolution
Hold time	0 to 3,600 seconds, 1-ms resolution
Return time	0 to 3,600 seconds, 1-ms resolution
Trigger source 13, 14	Immediate (continuous), external (rear-panel connector), manual (front-panel button), bus or internal timer
Marker	Indicated by the trailing edge of the Sync pulse; adjustable to any frequency between Start and Stop for Linear and Logarithmic
	types or any frequency in the list for List type.
Internal timer for FSK,	BPSK, burst, and sweep
Range	1 μs to 8,000 seconds, 6-digit or 8-ns resolution (33500B Series models)
	1 μs to 4,000 seconds, 4-ns resolution (33600A Series models)

Two-channel characteristics (all 2-channel models)

Standard					
Trueform Models	33500B Series, 2-channel models	33600A Series, 2-channel models			
Standard					
Operating modes	Independent, Coupled parameter(s), Combined (Ch	1 + Ch 2), Equal (Ch $1 = Ch 2$), or Differential (Ch $1 = -Ch 2$)			
Parameter coupling	None, Frequency (ratio or difference) and/or Amplitude and DC offset				
Relative Phase	0° to 360°, 0.1° resolution				
Channel-to-channel skew (typ)	< 200 ps < 100 ps				
(Both channels configured identically)					
Crosstalk (typ)	< -85 dB				

IQ player characteristics (33512B, 33522B, 33612A, 33622A)

IQ player characteristics						
Trueform Series	33512B/33522B	33612A/33622A				
Balance adjust						
Operation	This enables a two-channel model with arbitrary waveform capability to function as a baseband IQ (quadrature modulation) source. Programmable impairments include amplitude imbalance, DC offset difference, and channel-to-channel time skew.					
Channel-to-channel amplitude balance 11	re ¹¹ -30% to +30%, 0.001% resolution					
Channel-to-channel DC offset difference	\pm (5 VDC - peak AC), 0.1-mV resolution into 50 Ω					
± (10 VDC - peak AC), 0.2-mV resolution into open circuit						
Channel-to-channel time skew	-4 ns to +4 ns, 10-ps resolution -1 ns to +1 ns, 10-ps resolution					
Display views	Voltage versus Time or Constellation diagram (Channel 1 versus Channel 2)					

Note: IQ player is now a standard option on 33512B/22B and 33612A/22A models.

Sync/Marker output

Trueform Series	33500B Series	33600A Series		
Sync/marker output				
Connector	Front-panel BNC, shell and pir	n isolated from chassis (± 42 V maximum)		
Functions	Sync, Sweep Marker, Burst Marker, Arbitrary Waveform Marker, or Off			
Assignment	Channel 1 or Channel 2			
Polarity	Normal or Inverted			
Output level (nom)	0 to +1.5 V into 50 Ω ; 0 to +3.0 V into high impedance			
Output impedance (nom)	50 Ω			
Minimum pulse width (nom)	16 ns 5 ns			

Footnotes referenced on page 18.

Modulation input

Trueform Series	33500B Series	33600A Series			
Modulating input					
Connector	Rear-panel BNC, shell and pin isolated from chassis (± 42 V maximum)				
Assignment	Channel 1, Channel 2, or both				
Voltage level (nom)	\pm 5 V full-scale \pm 1 V or \pm 5 V full scale, selectable				
Input Impedance (nom)	5 kΩ				
Bandwidth (-3 dB) (typ)	0 Hz to 100 kHz				

External trigger/gate input/output

Trueform Series	33500B Series	33600A Series				
General characteristics						
Connector	Rear-panel BNC, chassis-referenced (functions as Input or Output)					
Assignment	Input: Channel 1, Channel 2, or both					
	Output: Cha	nnel 1 or Channel 2				
Polarity	Positive o	r Negative Slope				
Maximum rate		1 MHz				
Input characteristics						
Threshold voltage (nom)	(Output	level setting)/2				
Impedance (nom)	10 kΩ, DC-coupled					
Minimum pulse width	16 ns	100 ns				
Variable Trigger Delay	0 to 1,000 s, 4-ns resolution	0 to 1,000 s, 1-ns resolution				
Latency (typ)	< 135 ns with trigger delay set to zero	< 140 ns with trigger delay set to zero				
Jitter (typ)	< 2.5 ns, rms	< 320 ps, rms				
Output characteristics						
Output voltage (nom)						
Low level		0 V				
– High level	3 Vpp (nom) into open circuit	0.9 V to 3.8 V into open circuit				
	1.5 Vpp (nom) into 50Ω	0.1 V resolution				
Impedance (nom)		50 Ω				
Duty cycle (nom)	50%					
Fan-out	Up to four Keysight True <i>form</i> waveform generators					

External frequency reference input/output

Trueform Series	33500B Series	33600A Series		
Input characteristics				
Connector	Rear-panel BNC, shell and pin isolated fro	om chassis and all other connectors (± 42 V max.)		
Frequency range	Standard	: 10 MHz ± 20 Hz		
	Option OC	CX: 10 MHz ± 1 Hz		
Voltage	200 m	nVpp to 5 Vpp		
Impedence	1 kΩ 20 pF, AC-coupled			
Lock time (typ)	<2s			
Output characteristics				
Connector	Rear-panel BNC, chassis-referenced			
Frequency (nom)	10 MHz			
Level (nom)	0 dBm (632 mVpp) into 50 Ω			
Impedance (nom)	50 Ω			

Footnotes referenced on page 18.

Programming times

Trueform Series		335	500B Series			33	600A Series	;
Configuration changes (meas)	LAN (socket)	LAN (VXI-11)	USB 2.0	GPIB	LAN (socket)	LAN (VXI-11)	USB 2.0	GPIB
Change function (meas)	5 ms	6 ms	5 ms	5 ms	29.2 ms	29.7 ms	29.4 ms	29.2 ms
Change frequency (meas)	2 ms	3 ms	2 ms	3 ms	2.7 ms	3.3 ms	2.8 ms	2.7 ms
Change amplitude (meas)	20 ms	20 ms	19 ms	22 ms	8.3 ms	9.0 ms	8.3 ms	8.3 ms
Select arbitrary waveform (16 k samples)(meas)	9 ms	11 ms	9 ms	9 ms	12.7 ms	13.9 ms	13.1 ms	12.6 ms
Arbitrary waveform download speed to volatile	LAN (socket)	LAN (VXI-11)	USB 2.0	GPIB	LAN (socket)	LAN (VXI-11)	USB 2.0	GPIB
4k samples (binary transfer)(meas)	6 ms	18 ms	8 ms	39 ms	6.4 ms	13.2 ms	6.6 ms	52.3 ms
1M samples (binary transfer)(meas)	1.3 s	2.6 s	13 s	9.1 s	1.26 s	2.40 s	1.25 s	12.3 s

Memory

Trueform Series	33500B Series	33600A Series				
Arbitrary waveform						
Volatile	1 MSa/channel (16 MSa/channel with Option MEM). 512 sequence steps per channel	4 MSa/channel (64 MSa/channel with Option MEM). 512 sequence steps per channel				
Non-volatile	64 MB in file system (~32 MSa of arbitrary waveform records)	970 MB in file system (~485 MSa of arbitrary waveform records)				
Instrument state						
Store/recall	User defined instrument states (with user-defined names in file system)					
Power-On state	Default settings or state at power-off, selectable					
USB file system						
Front-panel port	USB 2.0 high-speed mass storage class (MSC) device					
Capability	Read or write instrument configuration settings, instrument states, arbitrary-waveform, and sequence files					
Speed (nom)	10 MB/s					

General characteristics

Trueform Series	33500B Series	33600A Series	
Computer interfaces			
LXI-C (rev1.3)	10/100Base-T (Sockets & VXI-11 protocols)		
	USB 2.0 (USB-TMC488 protocol)		
	GPIB/IEEE-488.1, IEEE-488.2		
Web user interface	Remote operation and monitoring		
Programming language	SCPI-1999, IEEE-488.2		
	Keysight 33210A, 33220A and 33250A Series compatible		
Graphical display	4.3 inch color TFT, WQVGA (480x272) with LED backlight		
Real-time clock/calendar battery	CR-2032 coin type, replaceable, > 5-year life (typ)		
Mechanical			
Size (nom)	261.1 mm W x 103.8 mm H x 303.2 mm D (with bumpers installed)		
	212.8 mm W x 88.3 mm H x 272.3 mm D (with bumpers removed)		
	2U x 1/2 rack width		
Weight (nom)	3.3 kg (7.2 lbs.)	3.5 kg (7.7 lbs.)	
Environmental			
Storage temperature	-40 °C to 70 °C		
Warm-up time	1 hour		
Operating environment	EN61010, pollution degree 2, indoor locations		
Operating temperature	0 °C to 55 °C		
Operating humidity	5% to 80% RH, non-condensing		
Operating altitude	Up to 3,000 meters		

Footnotes referenced on page 18.

General characteristics (Continued)

Trueform Series	33500B Series	33600A Series	
Regulatory			
_	Refer to the Declaration of Conformity		
	Acoustic noise: Sound pressure level (1-m free-field)(nom) 35 dB(A) at T _{AMBIENT} ≤ 28 °C		
Line power			
Line voltage	100 to 240 V, 50/60 Hz		
	100 to 120 V, 400 Hz		
Power consumption	< 45 W, < 130 VA	< 75 W, < 150 VA	

Footnotes

- 1 Applies to 120 MHz models (33621A/22A) only.
- 2 DC Offset set to zero.
- 3 Add 1/10 of the specification per °C for operation at temperatures below 18 °C or above 28 °C.
- 4 At low amplitude, non-harmonic spurious level is -100 dBm (typ).
- 5 Measured with a Keysight E5052B signal source analyzer. Phase noise improves by 20 dB/decade as output frequency is decreased.
- 6 Subject to pulse width limits.
- 7 Measured with a Keysight E5052B signal source analyzer.
- 8 Maximum sample rate with Filter "Off" in 160 MSa/s for 80 MHz models and 250 MSa/s for 120 MHz models.
- 9 Maximum amplitude is less at high frequency for certain waveforms.
- 10 Counted burst is not available for Gaussian Noise.
- 11 Subject to amplitude limits.
- 12 All frequency changes are phase-continuous.
- 13 External trigger only for sweep time > 8,000 seconds.
- Measured with a Square or Pulse waveform, edge time set to minimum, and trigger delay set to zero. Trigger latency is generally greater for other instrument settings. For some waveforms, trigger latency is a function of output frequency.
- 15 Only available on 33511B/12B/21B/22B models.
- 16 Only available on 33519B/20B/21B/22B models.
- 17 Auto range ON.
- 18 Output noise is typically 20 dB lower when (DC + Peak AC) < 320 mV (into 50 Ω) or 640 mV (into open circuit).
- 19 Limited to arbitrary waveforms that are < 1 million points, phase resolution limited by number of points in arbitrary waveforms < 3,600 points.
- 20 Only applies to 33511B/12B/21B/22B and 33611A/12A/21A/22A models.

Definitions

Specification (spec)

The warranted performance of a calibrated instrument that has been stored for a minimum of 2 hours within the operating temperature range of 0 to 55 °C and after a 1-hour warm up period. All specifications account for the effects of measurement and calibration-source uncertainties, and were created in compliance with ISO-17025 methods. Data published in this document are specifications (spec) only where specifically indicated.

Typical (typ)

The characteristic performance that 80% or more of manufactured instruments will meet. This data is not warranted, does not include measurement or calibration-source uncertainty, and is valid only at room temperature (approximately 23 °C).

Nominal (nom)

The mean or average characteristic performance, or the value of an attribute that is determined by design such as a connector type, physical dimension, or operating speed. This data is not warranted and is measured at room temperature (approximately 23 °C).

Measured (meas)

An attribute measured during product development for the purpose of communicating expected performance. This data is not warranted and is measured at room temperature (approximately 23 °C).

www.keysight.com/find/function-generators

Learn more at: www.keysight.com

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

